

- NOTES:**
1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS. ANY DISCREPANCIES, ERRORS OR OMISSIONS TO BE BROUGHT TO THE ATTENTION OF PROJECT MANAGER.
  2. ALL DIMENSIONS TO BE CHECKED BEFORE COMMENCEMENT OF WORK ON SITE.
  3. DRAWING NUMBER SFSR-WSP-GEN-ZZ-DR-C-011 HAS BEEN WITHDRAWN FROM CIRCULATION. THIS SHEET 10 IS NOW FOLLOWED BY SHEET 12.
  4. ALL DIMENSIONS IN METRES UNLESS OTHERWISE STATED.

- KEY:**
- RED LINE BOUNDARY
  - PROPOSED FOOTWAY RESURFACING PLANE OFF 25mm AND REINSTATE 25mm (BUFF Q.)
  - PROPOSED FOOTWAY RESURFACING PLANE OFF 25mm AND REINSTATE 25mm (RED)
  - PROPOSED FOOTWAY CONSTRUCTION EXCAVATE 275mm AND REINSTATE 275mm (RED)
  - PROPOSED FOOTWAY CONSTRUCTION EXCAVATE 275mm AND REINSTATE 275mm (BUFF Q.)
  - PROPOSED FOOTWAY CONSTRUCTION EXCAVATE 275mm AND REINSTATE 275mm (BLACK)
  - PROPOSED FOOTWAY RESURFACING OVERLAY 25mm AND 0-25mm REGULATING (BUFF Q.)
  - PROPOSED FOOTWAY RESURFACING OVERLAY 25mm AND 0-25mm REGULATING (RED)
  - PROPOSED FOOTWAY RESURFACING OVERLAY 25mm AND 0-25mm REGULATING (BLACK)
  - TAKE UP EXISTING FLAGS, RELAY 75mm FLEXIBLE CONSTRUCTION (BLACK) \*
  - PROPOSED EDGING KERB
  - PROPOSED TRAM & LADDER TACTILES EXCAVATE 275mm AND REINSTATE 275mm
  - PROPOSED HAZARD PAVING (CONTRASTING) EXCAVATE 275mm AND REINSTATE 275mm
  - PROPOSED VERGE WORKS

TO2	24/09/24	TD	VALUE ENGINEERING AMENDMENTS	LJS	CH
T01	23/05/24	KH	INITIAL ISSUE	LJS	CH
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: **D1- FOR COSTING**

**wsp**

Amber Court  
William Armstrong Drive  
Newcastle upon Tyne  
NE4 7YQ, UK

T+ 44 (0) 191 226 2000  
F+ 44 (0) 191 226 2104  
wsp.com

CLIENT: **North Tyneside Council**

PROJECT: **Sea Front Sustainable Route**

TITLE: **General Arrangement  
Sheet 6 of 14**

SCALE @ A1: <b>1:500</b>	CHECKED: <b>SS</b>	APPROVED: <b>LJS</b>
PROJECT No: <b>ED/101002</b>	DESIGNED: <b>JKn</b>	DRAWN: <b>SO</b>
DATE: <b>23/05/2024</b>		REV: <b>T02</b>

DRAWING No: **SFSR-WSP-GEN-ZZ-DR-C-0006**


© WSP UK Ltd

**SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION**

IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING

- EMERGENCY SERVICES
- PEDESTRIAN MANAGEMENT
- UTILITIES
- VULNERABLE ROAD USERS
- WORKING ADJACENT BUSINESSES
- WORKING HOURS
- TRAFFIC MANAGEMENT
- ANTI-SOCIAL BEHAVIOUR
- ENVIRONMENTAL CONDITIONS
- DUST MANAGEMENT
- REPUTATION DAMAGE
- RESIDENT PUSH BACK
- WORKING ADJACENT PROTECTED SPECIES
- WORKING ADJACENT TO RETAINING STRUCTURES
- ACCESS TO PLACES OF WORSHIP
- SSSI
- ALL WORKS ADJACENT TO FLOOD ZONE 3

IT IS ASSUMED THAT ALL WORKS WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WORKING, WHERE APPROPRIATE, TO AN APPROVED METHOD STATEMENT

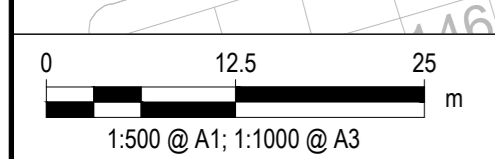

SEE SHEET 7